


T0060A Thyristor Surge Suppressor

Dimensions



Size	A (inch)	B (inch)	C (inch)	D (inch)
	0.0550.062	0.0980.114	0.1570.181	0.0670.091
Size	E (inch)	F (inch)	G (inch)	H (inch)
	0.0060.012	0.0350.059	0.0040.008	0.1850.209



Marking:

T006A Part Number


0912 Production Date

0912 means 6th weak ,2009

RECOMMENDED SOLDERING PAD AND REFLOW PROFILE

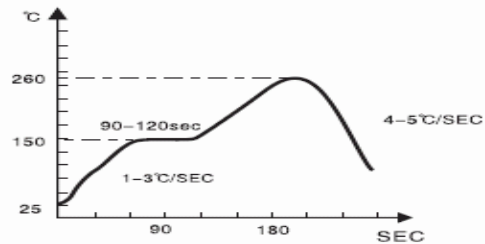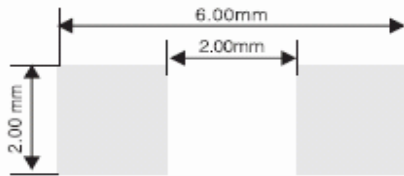

PACKAGE REEL INFORMATION

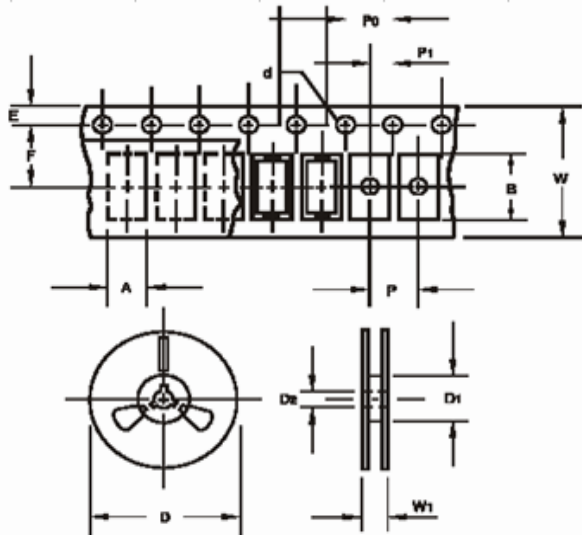

SMA (DO-214AC)

REF.	mm(inch)
A	2.6+/-0.15(.102+/-0.006)
B	5.15+/-0.15(.203+/-0.006)
d	1.5+/-0.1(.059+/-0.004)
D	330.0(13.0)
D1	50Min
D2	13+/-0.5(.512+/-0.020)
E	1.5+/-0.1(.059+/-0.004)
F	5.65+/-0.05(.222+/-0.002)
P	4.0+/-0.1(.157+/-0.004)
P0	4.0+/-0.1(.157+/-0.004)
P1	2.0+/-0.1(.079+/-0.004)
W	12.0+/-0.2(.472+/-0.008)
W1	16.8+/-2.0(.661+/-0.079)

OUTLINE	REEL (PCS)	PER CARTON (PCS)	REEL DIAMETER (mm)	CARTON SIZE (mm)		
				L	W	H
TAPING	5,000	40,000	330	360	360	360