


T-BV XX C Thyristor Surge Suppressor

Description


- ◆ IEC 61000-4-2(ESD)±15KV(air),±8KV(contact) .
- ◆ 150 Watts peak pulse power($t_p=8/20\mu S$) .
- ◆ Ultra low capacitance: **0.6pF** maximum .
- ◆ Low clamping voltage .
- ◆ Small package: SOD-323 .



Electrical Parameters @ T=25°C RH = 45%-75%

Part Number	Marking	VDRM	IDRM	VBR	IR	Vc	Ipp	Vc	Ipp	CO
		V	μA	V	mA	V	A	V	A	pF
			MAX	MIN		MAX		MAX		MAX
T-BV03C	CC	3	20	4	1	5.15	1	13.9	12	0.6
T-BV05C	AC	5	5	6	1	9.80	1	18.3	8	0.6
T-BV08C	BC	8	2	8.5	1	13.4	1	18.5	8	0.6
T-BV12C	DC	12	1	13.3	1	19.0	1	28.6	6	0.6
T-BV15C	EC	15	1	16.7	1	24.0	1	31.8	5	0.6
T-BV24C	HC	24	1	26.7	1	43.0	1	56.0	3	0.6

- ◆ V Off-state capacitance is measured in $V_{DC}=0V, R_{MS}=1V, F=1MHz$
- ◆ All measurements are made at an ambient temperature of 25°C
- ◆ Surge Waveform: 8/20 μS

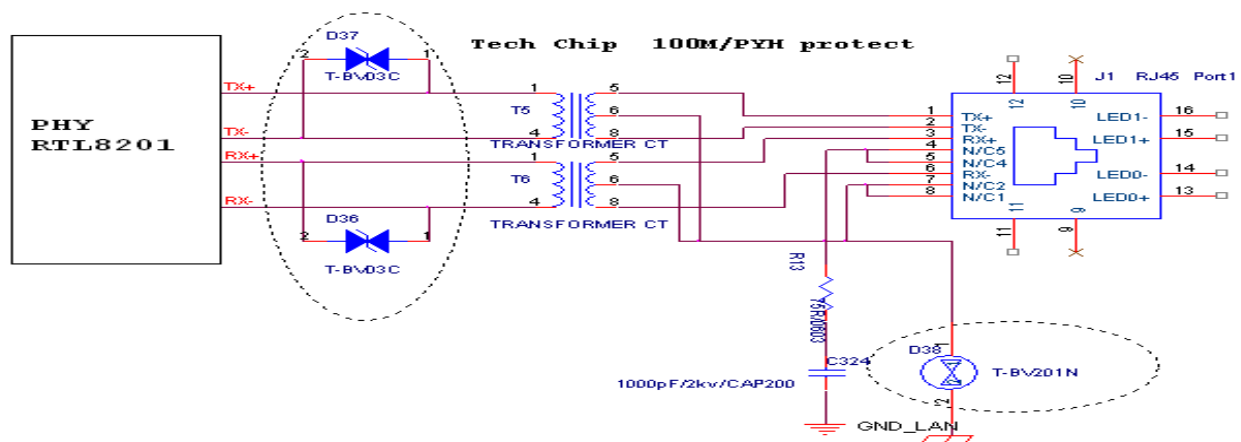


Description of Part Number

T BVXXC

- ① Tech-chip Transient Voltage Suppressor ② Series: 05

T-BV XX C Thyristor Surge Suppressor



Dimensions

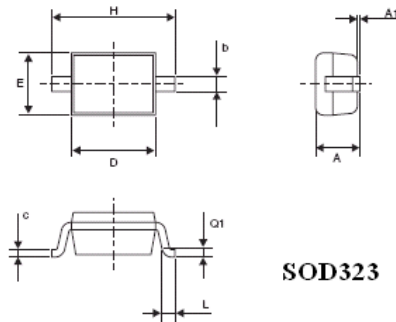


SOD323

Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A		1.17		0.046
A1	0	0.1	0	0.004
b	0.25	0.44	0.01	0.017
c	0.1	0.25	0.004	0.01
D	1.52	1.8	0.06	0.071
E	1.11	1.45	0.044	0.057
H	2.3	2.7	0.09	0.106
L	0.1	0.46	0.004	0.02
Q1	0.1	0.41	0.004	0.016

RECOMMENDED SOLDERING PAD AND REFLOW PROFILE

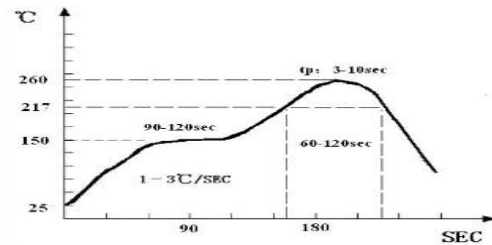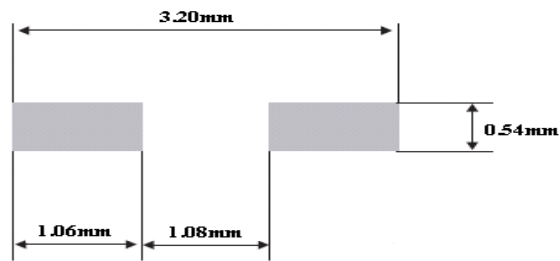

PACKAGE REEL INFORMATION

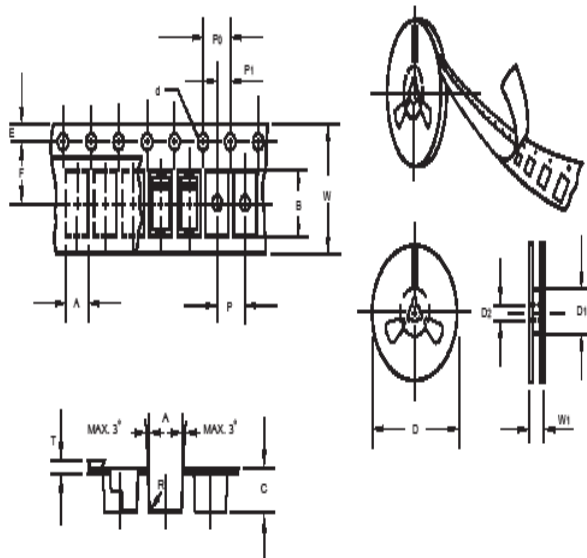

REF.	mm	inch
A	1.46±0.10	0.057±0.004
B	2.9±0.10	0.114±0.004
C	1.25±0.10	0.049±0.004
d	1.50±0.12	0.059±0.005
D	178±1.00	7.01±0.039
D1	55Min.	2.165Min.
D2	13.0±0.50	0.511±0.020
E	1.75±0.10	0.069±0.004
F	3.50±0.05	0.138±0.002
P	4.00±0.10	0.158±0.004
P0	4.00±0.10	0.158±0.004
P1	2.00±0.05	0.079±0.002
T	0.25±0.02	0.01±0.001
W	8.00±0.30	0.315±0.012
W1	14.4±0.50	0.567±0.020

OUTLINE	REEL (PCS)	PER CARTON (PCS)	REEL DIAMETER (mm)	CARTON SIZE (mm)		
				L	W	H
TAPING	3,000	90,000	117	360	370	220