

The TQELSG115V0 provides a typical line to line capacitance of 0.45pF and low insertion loss up to 3GHz providing greater signal integrity making it ideally suited for USB 3.0 applications, such as Digital TVs, DVD players, Computing, set-top boxes and MDDI applications in mobile computing devices.

It has been specifically designed to protect sensitive components which are connected to high-speed data and transmission lines from overvoltage caused by ESD(electrostatic discharge), CDE (Cable Discharge Events),and EFT (electrical fast transients).


## Features

- Protects four I/O lines
- Low capacitance
- Working voltages : 5.5V
- Low leakage current
- Low capacitance (<1.0pF) for high-speed interfaces
- No insertion loss to 3.0GHz
- Response Time is < 1 ns
- Meets MSL 1 Requirements
- Solid-state silicon avalanche technology
- ROHS compliant
- TECH CHIPtechnology

SOT-363

## Main applications

- Digital Visual Interface (DVI)
- 10/100/1000 Ethernet
- USB 1.1/2.0/3.0/OTG
- IEEE 1394 Firewire Ports
- Projection TV Monitors and Flat Panel Displays
- Notebook Computers
- Set Top Box
- Projection TV



## Protection solution to meet

- IEC61000-4-2 (ESD) ±30kV (air), ±30kV (contact)
- IEC61000-4-4 (EFT) 40A (5/50ns)
- IEC61000-4-5 (Lightning) 5A (8/20µs)

## Ordering Information

Device	Qty per Reel	Reel Size
TQELSG115V0	3000	7 Inch

## Maximum ratings (Temp=25°C Unless Otherwise Specified)


Parameter	Symbol	Value	Unit
Peak Pulse Power (tp=8/20μs waveform)	PPPP	150	Watts
Peak Pulse Current(tp=8/20μs waveform)	I <sub>PP</sub>	+5	A
ESD Rating per IEC61000-4-2:	Contact	30	KV
	Air	30	
Lead Soldering Temperature	T <sub>L</sub>	260 (10 sec.)	°C
Operating Temperature Range	T <sub>J</sub>	-55 ~ 150	°C
Storage Temperature Range	T <sub>STG</sub>	-55 ~ 150	°C

## Electrical characteristics (Temp=25°C Unless Otherwise Specified)


Symbol	Parameter	Conditions	Min.	Typ.	Max.	Units
V <sub>RWM</sub>	Reverse Working Voltage	Any I/O to Ground			5.5	V
V <sub>BR</sub>	Reverse Breakdown Voltage	I <sub>T</sub> = 1mA, Any I/O to Ground	6.0			V
I <sub>R</sub>	Reverse Leakage Current	V <sub>RWM</sub> = 5V Any I/O to Ground			1	μA
V <sub>F</sub>	Diode Forward Voltage	I <sub>F</sub> = 15mA		0.85	1.2	V
V <sub>C</sub>	Clamping Voltage	I <sub>PP</sub> = 1A, tp = 8/20μs, any I/O pin to Ground		8.5	9.0	V
		I <sub>PP</sub> = 5A, tp = 8/20μs, any I/O pin to Ground		11.5	15.0	V
I <sub>PP</sub>	Peak Pulse Current	tp = 8/20μs			5	A
C <sub>J</sub>	Junction Capacitance	V <sub>R</sub> = 0V, f = 1MHz, between I/O pins		0.45	0.6	pF
		V <sub>R</sub> = 0V, f = 1MHz, any I/O pin to Ground		0.8	1.0	pF

Junction capacitance is measured in V<sub>R</sub>=0V, F=1MHz


Symbol	Parameter
V <sub>RWM</sub>	Working Peak Reverse Voltage
V <sub>BR</sub>	Breakdown Voltage @ I <sub>T</sub>
V <sub>C</sub>	Clamping Voltage @ I <sub>PP</sub>
I <sub>T</sub>	Test Current
I <sub>RM</sub>	Leakage current at V <sub>RWM</sub>
I <sub>PP</sub>	Peak pulse current
C <sub>O</sub>	Off-state Capacitance
C <sub>J</sub>	Junction Capacitance

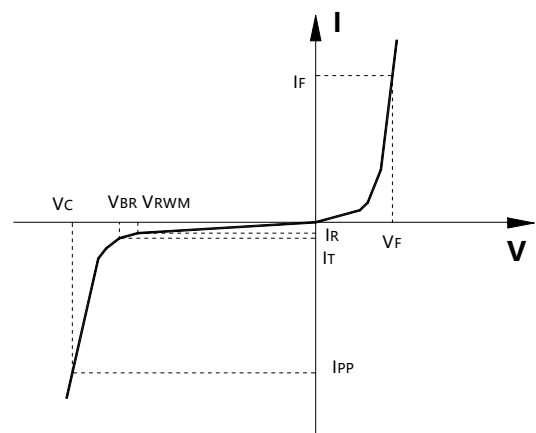


## Typical electrical characterist applications

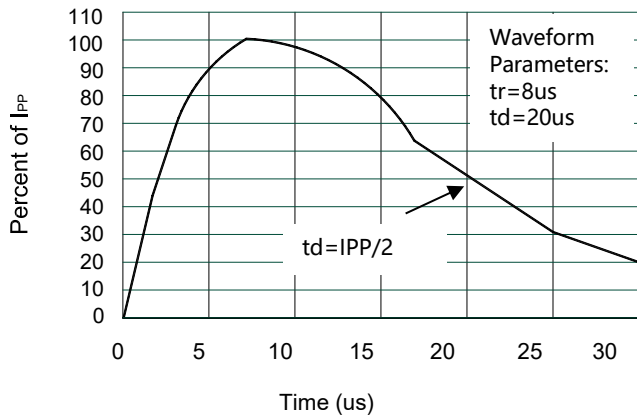

**Pulse Waveform**

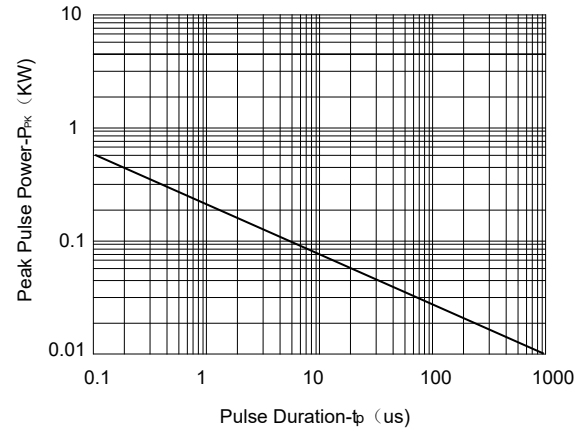


**Non-Repetitive Peak Pulse Power vs. Pulse Time**

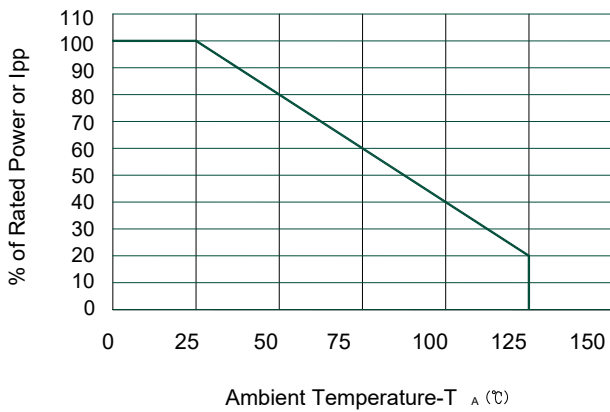


**Power Derating Curve**

**Typical applications**

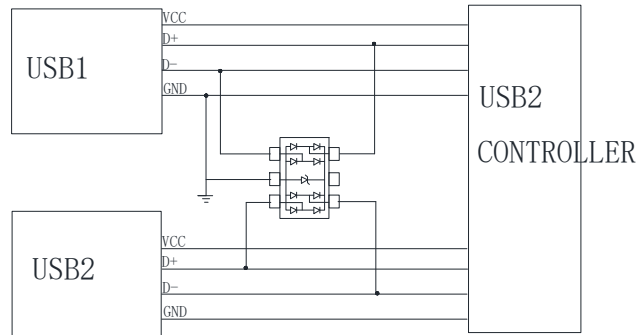

**DUAL USB PROTECTION FOR ESD**  
**ESD protection for USB port**

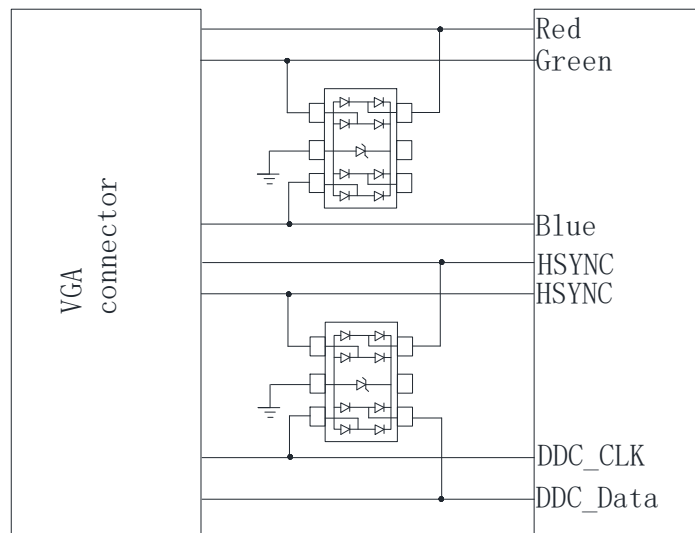


**ESD protection for VGA port**

## Package Information

### SOT363


#### Mechanical Data

- Case: SOT363
- Case Material: Molded Plastic. UL Flammability

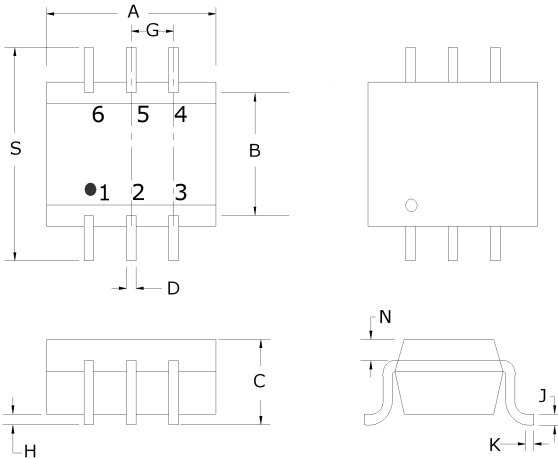


Dim	Millimeters		Inches	
	MIN	MAX	MIN	MAX
A	2.00	2.20	0.079	0.087
B	1.15	1.35	0.045	0.053
C	0.90	1.10	0.035	0.043
D	0.15	0.35	0.006	0.014
G	0.65BSC		0.026BSC	
H	--	0.10	--	0.004
J	0.08	0.15	0.003	0.006
K	0.15	0.35	0.006	0.014
N	0.20REF		0.008R EF	
S	2.15	2.45	0.085	0.096

#### Recommended Pad outline



#### SOT363 Reel Dim

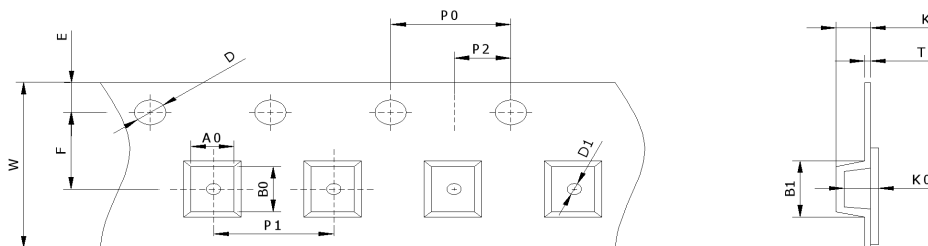

Package	Chip Size	Pocket Size B0×A0×K0(mm)	Tape Width	Reel Diameter	Quantity Per Reel	P0	P1
SOT363	2.20×2.45×1.10	2.30×2.55×1.20	8mm	178mm(7")	3000	4mm	4mm
D0	D1	E	F	K	T	W	
1.5mm	1.0mm	1.75mm	3.5mm	1.15mm	0.2mm	8mm	

## DISCLAIMER

TECH CHIP RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. TECH CHIP DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

THE GRAPHS PROVIDED IN THIS DOCUMENT ARE STATISTICAL SUMMARIES BASED ON A LIMITED NUMBER OF SAMPLES AND ARE PROVIDED FOR INFORMATIONAL PURPOSE ONLY. THE PERFORMANCE CHARACTERISTICS LISTED IN THEM ARE NOT TESTED OR GUARANTEED. IN SOME GRAPHS, THE DATA PRESENTED MAY BE OUTSIDE THE SPECIFIED OPERATING RANGE (E.G., OUTSIDE SPECIFIED POWER SUPPLY RANGE ) AND THEREFORE OUTSIDE THE WARRANTED RANGE.